




45 kg/m²



Resin + Mineral fillers
+ Coating

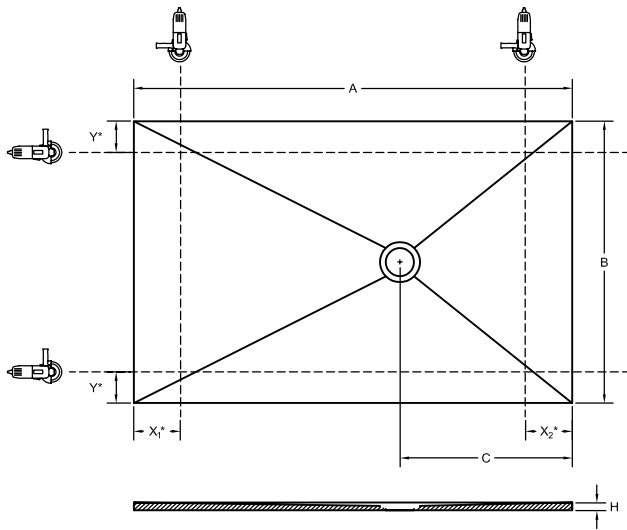

Anti-slip coating.
DIN 51097.



Coating with excellent
resistance to hydrolysis.



High coating
UV resistant.



SUPERIOR HARDNESS coating
(<0.01 mm according to UNE EN
14688; maximum allowed 0.1 mm).



Antibacterial treatment
R<2 ISO 22196.



It can be cut on site by
diamond saw



Recessed, raised or on Quare
feet installation. Consult
installation manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.



MAGMA

A 900 - 1800 | B 700-900



Class C / PN24 / Class 3

(*) Maximum recommended cut. For other cuts, please consult us.

		A (mm)					
		900	1000	1200	1400	1600	1800
		C	H	X ₁ *	X ₂ *	Y*	
700	C	450	465	465	550	-	-
	H	25	25	25	25	-	-
	X ₁ *	50	100	200	200	-	-
	X ₂ *	0	0	0	100	-	-
	Y*	0	0	0	0	-	-
800	C	-	465	465	550	750	800
	H	-	25	25	25	25	27
	X ₁ *	-	100	200	200	200	200
	X ₂ *	-	-	-	100	100	100
	Y*	-	50	50	50	50	50
900	C	450	-	490	550	750	800
	H	25	-	25	25	25	27
	X ₁ *	50	-	200	200	200	200
	X ₂ *	0	-	0	100	100	100
	Y*	50	-	50	50	50	50

COLOURS



PURE WHITE



ANTRACITE

WASTES



EXTRA FLAT SHOWER WASTE
Flow rate 235 l/mn
Height 54 mm

GRID



STAINLESS STEEL GRID